
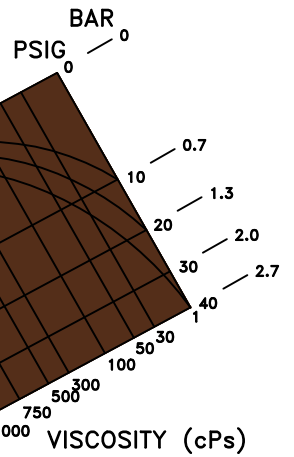



UNIBLOC®-PD SIZE 200-0

CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

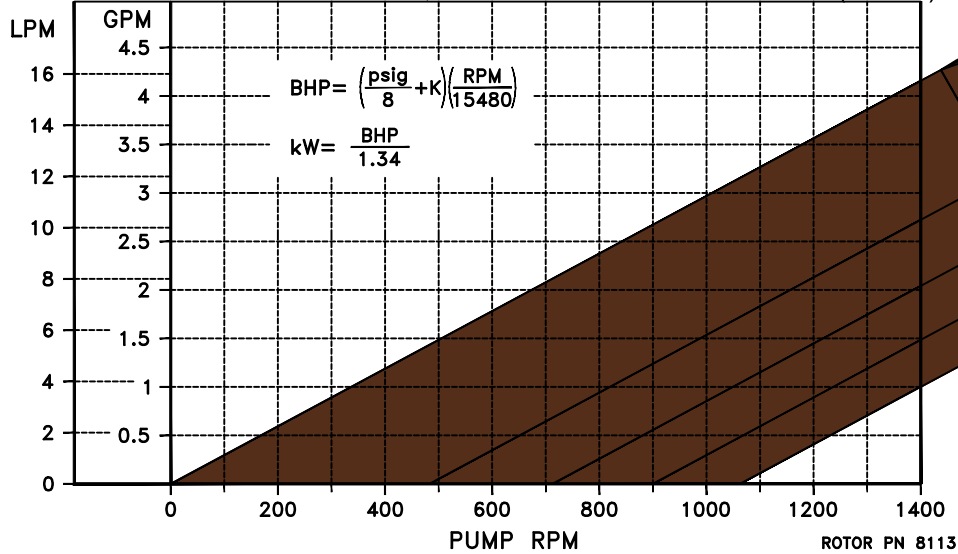

VISCOSITY FACTOR


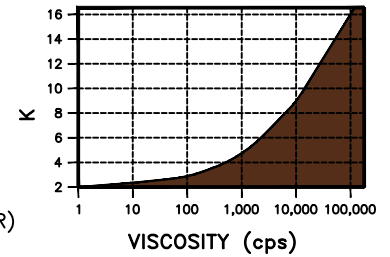


- *MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 120 PSIG (8 BAR)
- *MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 165 PSIG (11 BAR)
- *MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- *MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)


UNIBLOC®-PD SIZE 200

CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

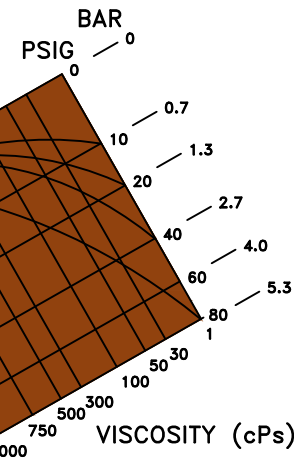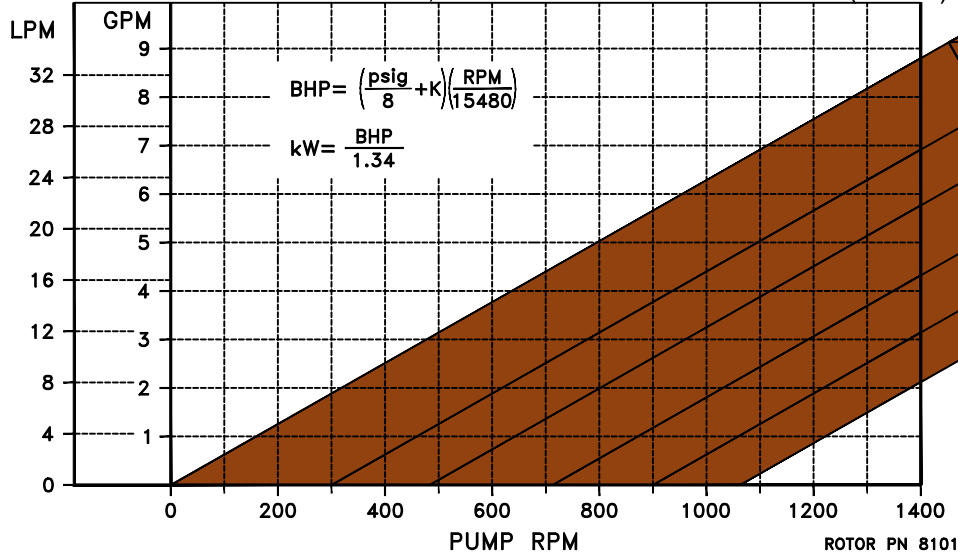

VISCOSITY FACTOR

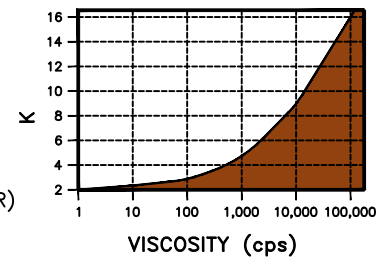

- *MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 120 PSIG (8 BAR)
- *MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 165 PSIG (11 BAR)
- *MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- *MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)

NOTE:
CAPACITIES VARY ±5%
*USE HIGHER CLASS PRESSURE/TEMPERATURE ROTORS FOR MAX PRESSURE/TEMPERATURE APPLICATIONS (CONTACT FACTORY FOR DETAILS)

UNIBLOC®-PUMP, INC.	
FLOWTECH DIV. USA	
DWG. TITLE	CAPACITY CHARTS (CLASS C ROTORS)
SIZE	DWG. NO.
200-0 & 200	D206C
RELEASE DATE MAR. 12, 2011 SHEET 1 OF 1	