



UNIBLOC®-PD SIZE 250

CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

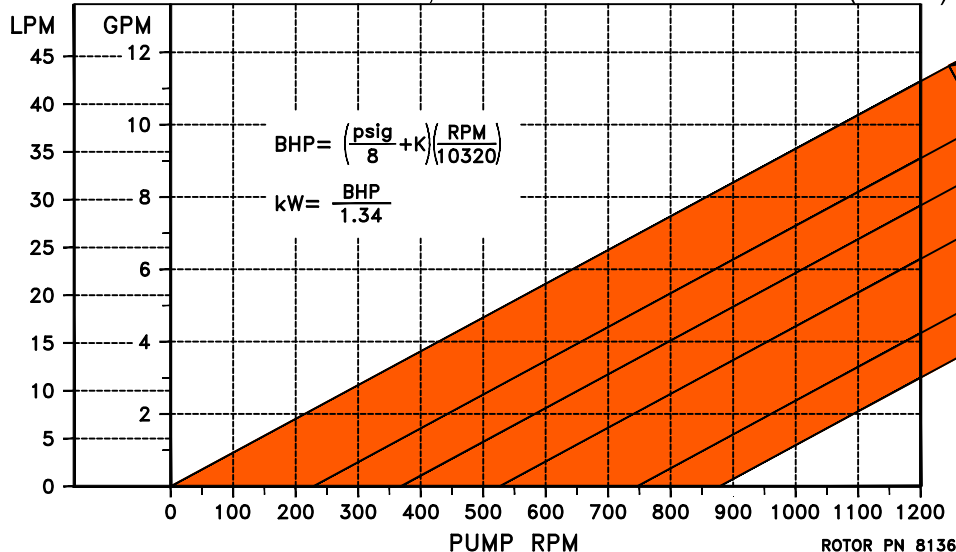

VISCOSITY FACTOR

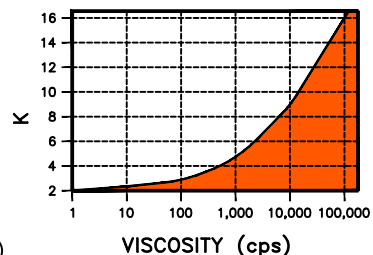

*MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 120 PSIG (8 BAR)

*MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 150 PSIG (10 BAR)


*MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)

*MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)


UNIBLOC®-PD SIZE 275

CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

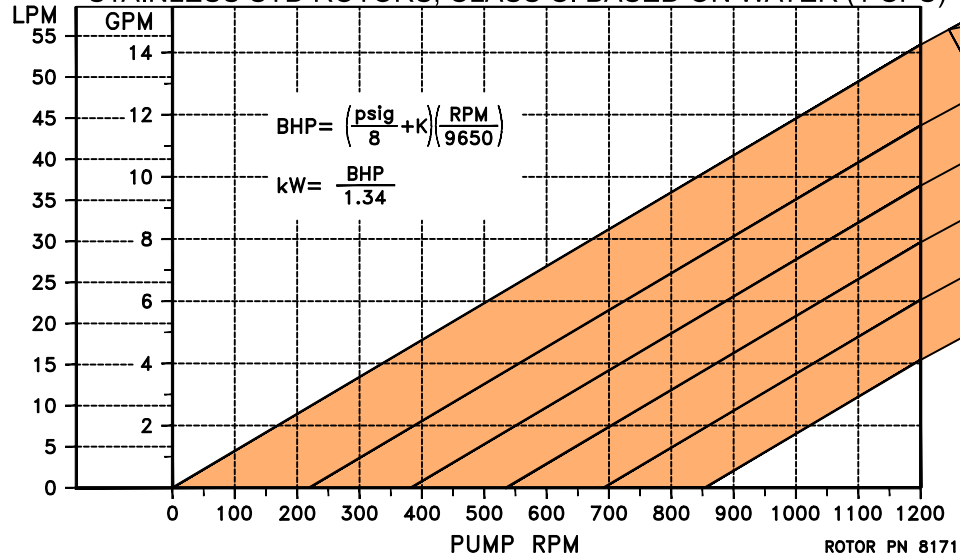

VISCOSITY FACTOR

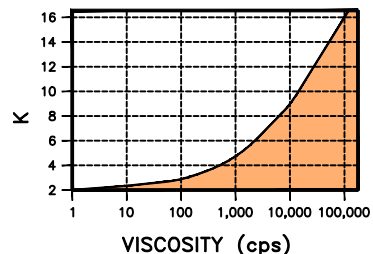

*MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 110 PSIG (7 BAR)

*MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 135 PSIG (9 BAR)

*MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)

*MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)

NOTE:
 CAPACITIES VARY ±5%
 *USE HIGHER CLASS ROTORS FOR MAX PRESSURE/TEMPERATURE APPLICATIONS
 (CONTACT FACTORY FOR DETAILS)

UNIBLOC®-PUMP, INC.	
FLOWTECH DIV.	USA
DWG. TITLE CAPACITY CHARTS (CLASS C ROTORS)	
SIZE 250 & 275	DWG. NO. D208C
RELEASE DATE	SHEET 1 OF 1