
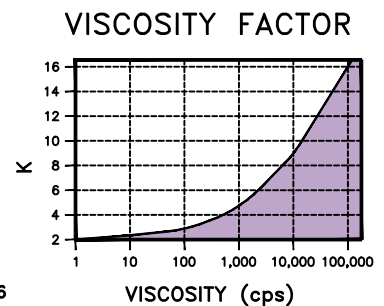



UNIBLOC[®]-PD SIZE 575 & 576

CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

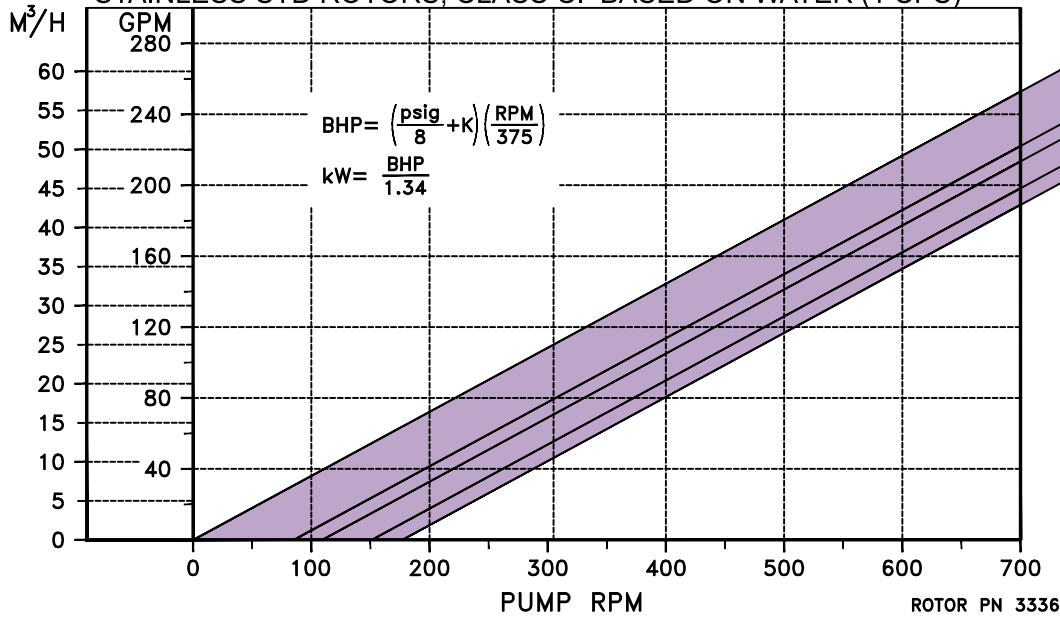

- *MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 150 PSIG (10 BAR) [FOR PD576: 175 PSIG (12 BAR)]
- *MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 225 PSIG (15 BAR) [FOR PD576: 255 PSIG (17 BAR)]
- *MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- *MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)

NOTE:
 CAPACITIES VARY ±5%
 *USE HIGHER CLASS ROTORS FOR MAX PRESSURE/TEMPERATURE APPLICATIONS
 (CONTACT FACTORY FOR DETAILS)

UNIBLOC[®]-PUMP, INC.	
<small>FLOWTECH div. USA</small>	
DWG. TITLE CAPACITY CHARTS (CLASS C ROTORS)	
SIZE	DWG. NO.
575	D565C
<small>RELEASE DATE MAR. 12, 2011 SHEET 1 OF 1</small>	