
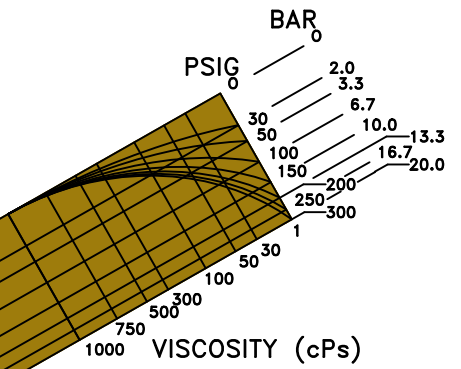



# UNIBLOC®-PD SIZE 602

## CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

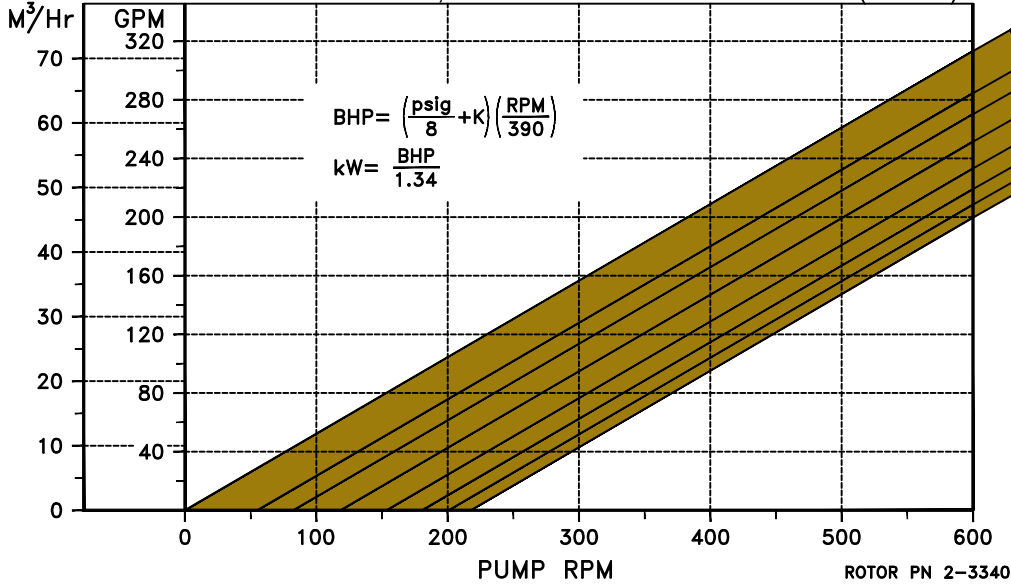

### VISCOSITY FACTOR


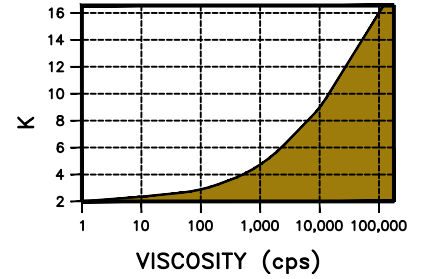


- \*MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 300 PSIG (20 BAR)
- \*MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 375 PSIG (25 BAR)
- \*MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- \*MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)


# UNIBLOC®-PD SIZE 652

## CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

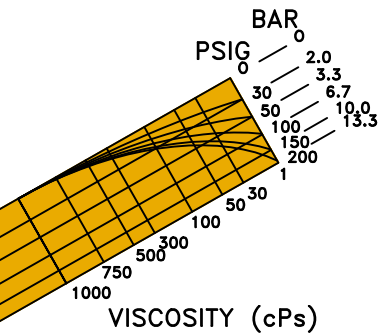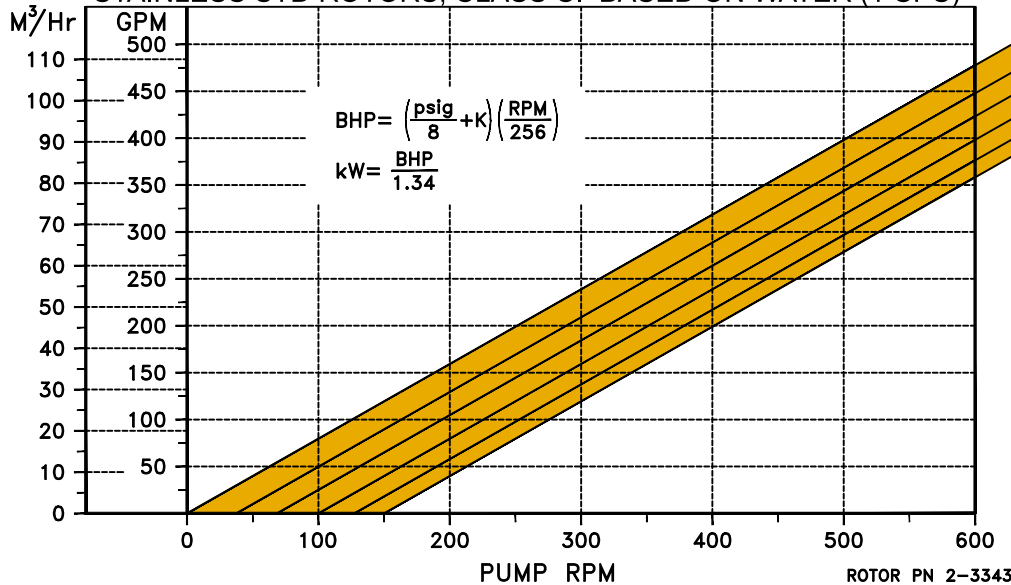

### VISCOSITY FACTOR

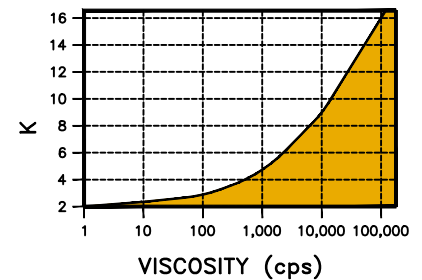

- \*MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 300 PSIG (20 BAR)
- \*MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 375 PSIG (25 BAR)
- \*MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- \*MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)

NOTE:  
 CAPACITIES VARY ±5%  
 \*USE HIGHER CLASS ROTORS FOR MAX PRESSURE/TEMPERATURE APPLICATIONS  
 (CONTACT FACTORY FOR DETAILS)

<b>FLOWTECH</b> DIV.	
UNIBLOC® PUMP, INC. USA	
DWG. TITLE CAPACITY CHARTS (CLASS C ROTORS)	
SIZE <b>602 &amp; 652</b>	DWG. NO. <b>D2-605C</b>
RELEASE DATE OCT. 01, 2009   SHEET 1 OF 1	